

# B60LPU

Fluorescent Emergency Ballast

# PHILIPS bodine

A Division Of Philips Electronics North America Corporation

**One- or two-lamp emergency;  
Universal input voltage:  
120 through 277 VAC, 50 or 60 Hz;  
End-of-lamp-life compatible;  
For damp locations**

## Product Summary

### UL LISTED

Factory or Field Installation  
(Damp)



### Illumination Time

90 Minutes (Standard)

### Initial Light Output

350 - 700 Lumens

### Full Warranty

3 Years (NOT pro-rata)

### Universal Input Voltage

120 through 277 VAC, 50 or 60 Hz

### AC Input Current

40 mA

### AC Input Power Rating

3.5 Watts

### Test Switch and Charging Indicator Light

Single Pole with Integrated LED  
(Illuminated Test Switch)

### Battery

High-Temperature,  
Maintenance-Free  
Nickel-Cadmium Battery  
7- to 10-Year Life Expectancy

### Battery Charging Current

200 mA

### Recharge Time

24 Hours

### Temperature Rating (Ambient)

0°C to +50°C  
(32°F to 122°F)


### Dimensions

16.7" x 1.7" x 1.18"  
(424 mm x 43 mm x 30 mm)  
Mounting Center 16.33" (415 mm)

### Weight

2.25 lbs. (1.02 kg)

*Emergency ballasts can be modified to accommodate longer run times.*

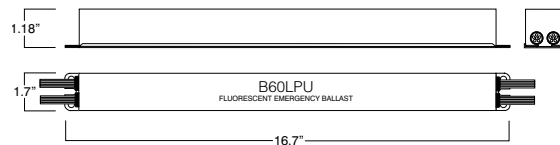

## APPLICATION

The B60LPU Universal Input emergency ballast works in conjunction with an AC ballast to convert fluorescent fixtures into unobtrusive emergency lighting. The emergency ballast handles a wide range of input voltages and frequencies and consists of a high-temperature nickel-cadmium battery, charger and electronic circuitry in one compact case. The B60LPU can be used with most 17 - 215 W (2' - 8') T8, T10 or T12 fluorescent lamps without integral starters, including U-shaped, HO, VHO, circline and energy-saving, and (4-pin) long compacts (see Table 1). It is also compatible with most 120 through 277 VAC (50 or 60 Hz) one-, two-, three- and four-lamp electronic, standard, energy-saving and dimming AC ballasts. If used in an emergency-only fixture, no AC ballast is necessary. The B60LPU is suitable for indoor and damp locations and for sealed & gasketed fixtures. It is not suitable for air handling heated air outlets or wet or hazardous locations. For information about specific lamp and ballast compatibility, please call the factory. Recommended applications include: international line voltages from 120 through 277 VAC (50 or 60 Hz); drilling rigs where generators are the primary source of power; and other applications requiring higher tolerance of line voltage variation or harmonic distortion.

## OPERATION

When AC power fails, the B60LPU immediately switches to the emergency mode, operating either one or two lamps at a reduced lumen output for a minimum of 90 minutes. When AC power is restored, the B60LPU automatically returns to the charging mode and, using a patented circuit, delays AC ballast operation for approximately 3 seconds to prevent false tripping of the AC ballast end-of-lamp-life shutdown circuits.

## INSTALLATION

The B60LPU does not affect normal fixture operation and may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to the emergency ballast. The emergency ballast must be fed from the same branch circuit as the AC ballast. The emergency ballast may be installed inside, on top of or remote from the fixture. The B60LPU may be remotely installed up to half the distance the AC ballast manufacturer recommends removing the AC ballast from the lamp or up to 50 feet, whichever is less. Installation is not recommended with fixtures where the ambient temperature may fall below 0°C.

## UL and CODE COMPLIANCE


The B60LPU has been tested by Underwriters Laboratories in accordance with the standards set forth in UL 924, "Emergency Lighting and Power Equipment," and is UL Listed for factory or field installation. Emergency illumination time exceeds the National Electrical Code (NEC), Life Safety Code (NFPA-LSC) and UL 90-minute requirements.

## Specifiers Reference

Project \_\_\_\_\_ Type \_\_\_\_\_ Model No. \_\_\_\_\_  
Comments \_\_\_\_\_

L2000073

12/04/13 © Philips Emergency Lighting  
P.O. Box 460 Collierville, TN USA 38027-0460  
Sales 800-223-5728 FAX 901-853-5009  
Tech. Support 888-263-4638  
www.philips.com/bodine



# B60LPU

EMERGENCY LIGHTING EQUIPMENT

**One- or two-lamp emergency;  
Universal input voltage:  
120 through 277 VAC, 50 or 60 Hz;  
End-of-lamp-life compatible;  
For damp locations**

Table 1 - Lamp Compatibility

LAMP DIAMETER	BASE	WATTAGE (Length)	NO. of LAMPS (EMERGENCY)
1", 1¼", 1½" T8, T9, T10, T12	Single or Bipin	17-40 W (2'-4')	1
		40-215 W (5'-8')	2
Long Compact	4-pin (2G11)	40 W	1

Table 2 - Initial Lumen Output

LAMP	LUMENS	
	1 Lamp	2 Lamps
FO32, FBO31 T8	575	650
F40T12, F40/U	350	500
F40T12/ES (34 W)	350	500
F96T12 HO, VHO	600	
PL-L 40W, F40/30BX, Dulux L 40 W	625	

## EMERGENCY ILLUMINATION

Depending on the number (one or two), wattage and type of lamps selected, the B60LPU produces 350 to 700 lumens initial emergency light output (see Table 2). If two-lamp operation is selected, light output is evenly divided between the lamps for better distribution of emergency illumination.

## SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with a Philips Bodine B60LPU Universal Input fluorescent emergency ballast. This emergency ballast shall consist of a high-temperature, maintenance-free nickel-cadmium battery, charger and electronic circuitry contained in one 16.7" x 1.7" x 1.18" metal case. A solid-state charging indicator light to monitor the charger and battery integrated into a single-pole test switch and installation hardware shall be provided. The emergency ballast, using a patented circuit, delays AC ballast operation for approximately 3 seconds to prevent false tripping of the AC ballast end-of-lamp-life shutdown circuits. The emergency ballast shall be capable of operating [one or two] \_\_\_\_\_ fluorescent lamp(s) at \_\_\_\_\_ lumens (see Table 2) initial light output in the emergency mode for a minimum of 90 minutes. It shall be suitable for indoor and damp locations and for sealed & gasketed fixtures. The B60LPU shall have 3.5 Watts of input power and a 12.0 Watt-hour battery capacity and shall comply with emergency standards set forth by the current NEC. The emergency ballast shall be UL Listed for installation inside, on top of or remote from the fixture and shall be warranted for a full three years from date of purchase.

## WARRANTY

Model B60LPU is warranted for three (3) full years from date of purchase. This warranty covers only properly installed Philips Bodine emergency ballasts used under normal conditions. For the warranty period, Philips Emergency Lighting will, at its option, repair or replace without charge a defective emergency ballast, provided it is returned to the factory transportation prepaid and our inspection determines it to be defective under terms of the warranty. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other charges; nor does it apply to any equipment of another manufacturer used in conjunction with the emergency ballast.

L2000073

12/04/13 © Philips Emergency Lighting  
P.O. Box 460 Collierville, TN USA 38027-0460  
Sales 800-223-5728 FAX 901-853-5009  
Tech. Support 888-263-4638  
www.philips.com/bodine

*For the most current technical information and notices, please visit TechNotes on our website.*